




## BEARING DE MEXICO, S.A. DE C.V.

### 25 mm x 37 mm x 7 mm NTN 6805 Sleeve Bearings

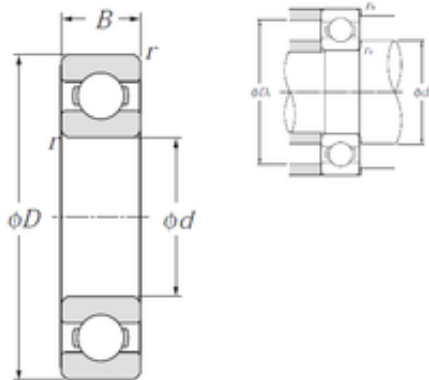

Bearing No. 6805

Size	25x37x7 mm
Bore Diameter	25 mm
Outer Diameter	37 mm
Width	7 mm
d	25 mm
D	37 mm
B	7 mm
C	7 mm
r min.	0,3 mm
da min.	27 mm
da max	28 mm
Da max.	35 mm
ra max.	0,3 mm
Weight	0,022 Kg
Basic dynamic load rating (C)	4,3 kN
Basic static load rating (C0)	2,95 kN
(Grease) Lubrication Speed	18 000 r/min
(Oil) Lubrication Speed	21 000 r/min
Category	Single Row Ball Bearings
Inventory	2.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.02
EAN	4547359006155
Product Group	B00308

6805 Bearing 2D drawings and 3D CAD models



## BEARING DE MEXICO,S.A.DE C.V.

Enclosure	Open
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	25MM Bore; 37MM Outside Diameter; 7MM Outer Race Diameter; Open; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	6805JR
Weight / LBS	0.045
Bore	0.984 Inch   25 Millimeter
Outside Diameter	1.457 Inch   37 Millimeter
Outer Race Width	0.276 Inch   7 Millimeter
bore diameter:	25 mm
precision rating:	Class 0
outside diameter:	37 mm
finish/coating:	Uncoated
overall width:	7 mm
bearing material:	High Carbon Chrome Steel



## BEARING DE MEXICO,S.A.DE C.V.

bore type:	Round
cage material:	Steel
closure type:	Open
inner ring width:	7 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	7 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	18000 rpm
internal clearance:	CN
maximum rpm (oil):	21000 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	0.3 mm
dynamic load capacity:	4300 N
manufacturer product page:	<a href="#">Click here</a>
static load capacity:	2950 N